


KYパッキン

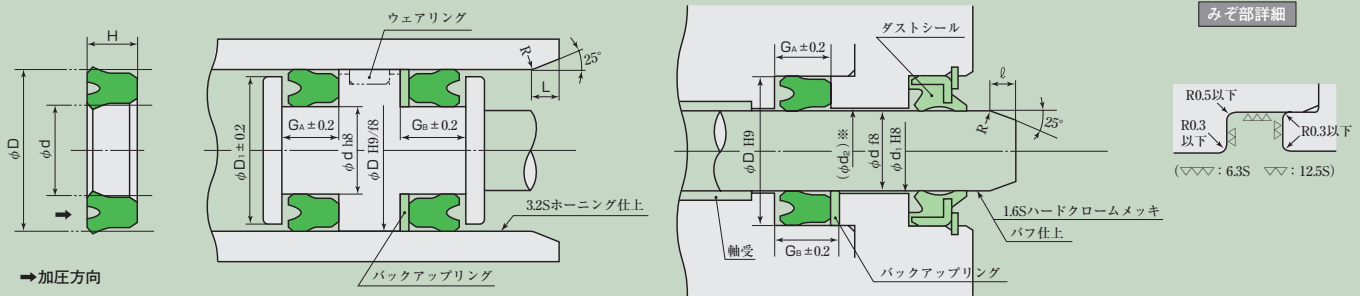

(注) ピストン用D=140以上ロッド用d=80以上は一体みぞに装着できます。この場合バックアップリングはバイアスカット (TC-KY-〇〇) をご指定下さい。

KYパッキン寸法表

単位: mm

呼び番号	パッキンおよびみぞ寸法							呼び番号	パッキンおよびみぞ寸法						
標準(RN 906)	d	D	H	GA	GB	D1	d1(参考)	標準(RN 906)	d	D	H	GA	GB	D1	d1(参考)
KY- 6.3	6.3	16.3	7.5	8.5	10.5	15.3	6.7		40	55	10	11	14	53	40.5
KY- 7.1	7.1	17.1	7.5	8.5	10.5	16.1	7.5	KY- 40	40	56	12	13	16	54	40.5
KY- 8	8	18	7.5	8.5	10.5	17	8.4		40	60	12	13	16	58	40.5
KY- 9	9	19	7.5	8.5	10.5	18	9.4		44	60	12	13	16	58	44.5
KY- 10	10	20	7.5	8.5	10.5	19	10.4		45	60	10	11	14	58	45.5
KY- 11.2	11.2	21.2	7.5	8.5	10.5	20.2	11.6		45	60	12	13	16	58	45.5
KY- 12.5	12.5	22.5	7.5	8.5	10.5	21.5	12.9	KY- 45	45	61	12	13	16	59	45.5
KY- 14	14	24	7.5	8.5	10.5	23	14.4	KY- 47	47	63	12	13	16	61	47.5
	15	25	6.5	7.5	9.5	24	15.4		50	65	10	11	14	63	50.5
KY- 15	15	28	10	11	13.5	27	15.4	KY- 50	50	66	12	13	16	64	50.5
KY- 16	16	26	7.5	8.5	10.5	25	16.4		50	70	12	13	16	68	50.5
	18	28	8	9	11	27	18.4	KY- 53	53	69	12	13	16	67	53.6
KY- 18	18	31	10	11	13.5	30	18.4		54	70	12	13	16	68	54.6
KY- 18.5	18.5	31.5	10	11	13.5	30.5	18.9	KY- 55	55	71	12	13	16	69	55.6
	20	30	8	9	11	29	20.4		55	72	12	13	16	70	55.6
KY- 20	20	33	10	11	13.5	32	20.4		55	75	12	13	16	73	55.6
	20	35	9.5	10.5	13	34	20.4		55	80	15	16	19	78	55.6
	22	35	8	9	11.5	34	22.4	KY- 56	56	72	12	13	16	70	56.6
KY- 22	22	35	10	11	13.5	34	22.4	KY- 60	60	76	12	13	16	74	60.6
KY- 22.4	22.4	35.4	10	11	13.5	34.4	22.8	KY- 60 80 12	60	80	12	13	16	78	60.6
	25	35	8	9	11	34	25.4	KY- 63	63	79	12	13	16	77	63.6
KY- 25	25	38	10	11	13.5	37	25.4	KY- 64	64	80	12	13	16	78	64.6
KY- 27	27	40	10	11	13.5	39	27.4	KY- 65	65	81	12	13	16	79	65.6
	28	40	10	11	13.5	39	28.4	KY- 67	67	87	15	16	19	85	67.6
KY- 28	28	41	10	11	13.5	40	28.4		70	90	12	13	16	88	70.6
KY- 30	30	43	10	11	13.5	42	30.5	KY- 70	70	90	15	16	19	88	70.6
	30	45	10	11	14	44	30.5	KY- 71	71	91	15	16	19	89	71.6
KY- 31.5	31.5	44.5	10	11	13.5	43.5	32.0		75	95	12	13	16	93	75.6
KY- 32	32	45	10	11	13.5	44	32.5	KY- 75	75	95	15	16	19	93	75.6
KY- 34	34	50	12	13	16	48	34.5		80	100	12	13	16	98	80.6
	35	50	10	11	14	48	35.5	KY- 80	80	100	15	16	19	98	80.6
KY- 35	35	50	12	13	16	48	35.5		85	105	12	13	16	103	85.6
KY- 35A	35	51	12	13	16	49	35.5	KY- 85	85	105	15	16	19	103	85.6
KY- 35.5	35.5	51.5	12	13	16	49.5	36.0		90	110	12	13	16	108	90.6
	36	52	12	13	16	50	36.5	KY- 90	90	110	15	16	19	108	90.6



KYパッキン

KYパッキン寸法表

単位：mm

呼び番号	パッキンおよびみぞ寸法							呼び番号	パッキンおよびみぞ寸法						
標準(RN 906)	d	D	H	G _A	G _B	D ₁	d ₁ (参考)	標準(RN 906)	d	D	H	G _A	G _B	D ₁	d ₁ (参考)
KY- 92	92	112	15	16	19	110	92.6	KY-280	280	312	24	26	29	309	280.8
KY- 95	95	115	15	16	19	113	95.6		283	315	24	26	29	312	283.8
	100	120	12	13	16	118	100.6	KY-285 315 22	285	315	22	24	27	312	285.8
KY-100	100	120	15	16	19	118	100.6	KY-290 320 18	290	320	18	20	23	317	290.8
	100	125	15	16	19	123	100.6	KY-290 320 22	290	320	22	24	27	317	290.8
KY-105	105	125	15	16	19	123	105.6	KY-300	300	332	24	26	29	329	300.8
KY-106	106	126	15	16	19	124	106.6		310	340	22	24	27	337	311
KY-110	110	130	15	16	19	128	110.6	KY-315	315	347	24	26	29	344	316
KY-112	112	132	15	16	19	130	112.6	KY-323 355 24	323	355	24	26	29	352	324
	115	135	15	16	19	133	115.6	KY-330 360 22	330	360	22	24	27	357	331
KY-118	118	138	15	16	19	136	118.6	KY-335	335	367	24	26	29	364	336
KY-120	120	140	15	16	19	138	120.6	KY-340 370 22	340	370	22	24	27	367	341
KY-125	125	150	19	21	24	147	125.7		340	372	24	26	29	369	341
KY-130 150 15	130	150	15	16	19	147	130.7		348	380	24	26	29	377	349
KY-130	130	155	19	21	24	152	130.7		350	382	24	26	29	379	351
KY-132	132	157	19	21	24	154	132.7	KY-355	355	387	24	26	29	384	356
KY-135 155 16	135	155	16	17	20	152	135.7	KY-360 392 24	360	392	24	26	29	389	361
KY-135A	135	160	15.7	17	20	157	135.7		365	395	22	24	27	392	366
KY-135	135	160	19	21	24	157	135.7	KY-368	368	400	24	26	29	397	369
	140	160	15	16	19	157	140.7	KY-375	375	407	24	26	29	404	376
KY-140	140	165	19	21	24	162	140.7	KY-388 420 24	388	420	24	26	29	417	389
KY-145	145	170	19	21	24	167	145.7	KY-400	400	432	24	26	29	429	401
KY-150	150	175	19	21	24	172	150.7	KY-415 450 25	415	450	25	27	30	447	416
KY-155A	155	180	15.7	17	20	177	155.7	KY-420 455 25	420	455	25	27	30	452	421
KY-155	155	180	19	21	24	177	155.7	KY-425	425	457	24	26	29	454	426
KY-160	160	185	19	21	24	182	160.7	KY-450	450	482	24	26	29	479	451
KY-165	165	190	19	21	24	187	165.7	KY-475	475	507	24	26	29	504	476
KY-170	170	195	19	21	24	192	170.7		480	515	25	27	30	512	481
KY-175A	175	200	15.7	17	20	197	175.7	KY-500	500	532	24	26	29	529	501
KY-175	175	200	19	21	24	197	175.7	KY-505 545 30	505	545	30	33	37	542	506
KY-180	180	205	19	21	24	202	180.7	KY-510 542 24	510	542	24	26	29	539	511
KY-190	190	215	19	21	24	212	190.8	KY-510 550 30	510	550	30	33	37	546	511
KY-195 220 19	195	220	19	21	24	217	195.8	KY-520 560 30	520	560	30	33	37	556	521
KY-199A	199	224	15.7	17	20	221	199.8	KY-530	530	570	30	33	37	566	531
KY-199	199	224	19	21	24	221	199.8	KY-560	560	600	30	33	37	596	561
KY-200	200	225	19	21	24	222	200.8	KY-570 610 30	570	610	30	33	37	606	571
KY-205 230 19	205	230	19	21	24	227	205.8	KY-580 620 30	580	620	30	33	37	616	581
	210	235	18	20	23	232	210.8	KY-600	600	640	30	33	37	636	601
	210	235	19	21	24	232	210.8	KY-630	630	670	30	33	37	666	631
KY-212	212	237	19	21	24	234	212.8	KY-660 700 30	660	700	30	33	37	696	
KY-215 240 19	215	240	19	21	24	237	215.8	KY-690 730 30	690	730	30	33	37	726	
KY-220 250 18	220	250	18	20	23	247	220.8	KY-700 740 30	700	740	30	33	37	736	
KY-224	224	249	19	21	24	246	224.8	KY-720 760 30	720	760	30	33	37	756	
	225	250	18	20	23	247	225.8	KY-740 780 30	740	780	30	33	37	776	
KY-225	225	250	19	21	24	247	225.8	KY-780 820 30	780	820	30	33	37	816	
KY-230 255 19	230	255	19	21	24	252	230.8	KY-790 830 30	790	830	30	33	37	826	
	235	260	19	21	24	257	235.8	KY-830 870 30	830	870	30	33	37	866	
KY-236	236	261	19	21	24	258	236.8	KY-900 940 30	900	940	30	33	37	936	
KY-240 265 19	240	265	19	21	24	262	240.8	KY-960 1000 30	960	1000	30	33	37	996	
KY-245 270 19	245	270	19	21	24	267	245.8	KY-960 1020 45	960	1020	45	48	53	1014	
KY-250	250	275	19	21	24	272	250.8	KY-1020 1080 45	1020	1080	45	48	53	1074	
KY-250 280 22	250	280	22	24	27	277	250.8	KY-1090 1150 45	1090	1150	45	48	53	1144	
KY-255 280 19	255	280	19	21	24	277	255.8	KY-1210 1270 45	1210	1270	45	48	53	1264	
KY-260 290 22	260	290	22	24	27	287	260.8	KY-1340 1400 45	1340	1400	45	48	53	1394	
KY-265	265	297	24	26	29	294	265.8								
	270	300	18	20	23	297	270.8								
	270	300	22	24	27	297	270.8								
KY-270	270	300	24	26	29	297	270.8								
	275	300	19	21	24	297	275.8								
	280	310	22	24	27	307	280.8								