


# TCV Type

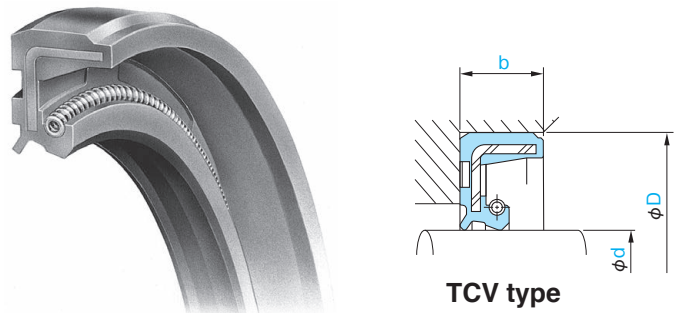

TCV type

- The sectional view on the right shows the typical profile of the seal type.
- Check the guide to allowable operating conditions on pages 10 and 11 for relevant information on the seal selected before use.
- If there is an “※” at the end of the part number, as this indicates that an SUS spring specification is available, we ask that you refer to the introduction on SUS spring specifications on page 150.

■When ordering, please indicate the NOK part number and the relevant dimensions.

Order Example NOK Part Number: AP 0090 E0  
Type: TCV, Shaft diameter: 7, Outside diameter: 20, Width: 7

14

TCV type

Dimensions			Part Number	
Shaft diameter d	Outside diameter D	Width b	Nitrile (NBR) A795	Fluorocarbon (FKM) F548
7	20	7	AP 0090 E0	—
8	18	7	AP 0145 E0 ※	—
8	22	7	AP 0158 F0	—
10	25	7	AP 0279 E0 ※	AP 0279 G1
12	25	7	AP 0382 E0 ※	—
13	28	7	AP 0478 E0	—
14	28	7	AP 0526 F0	—
15	30	7	AP 0598 A0	AP 0598 F3 ※
16	30	7	AP 0687 F0 ※	—
17	35	8	AP 0760 E0	—
18	35	8	AP 0829 E0	—
19	35	8	AP 0875 E0	—
20	32	8	AP 0997 E0	—
20	40	11	AP 1033 A0	AP 1033 H3
22	35	8	AP 1127 E0	—
22	42	11	AP 1148 E0	—
23	42	11	AP 1224 E0	—
24	40	8	AP 1260 E0	—
25	40	8	AP 1314 H0	—
25	45	11	AP 1338 A0	AP 1338 G4
26	42	8	AP 1474 F0 ※	—
27	47	11	AP 1518 F0	—
28	48	11	AP 1563 K0	AP 1563 I2
30	42	7	AP 1665 E0	—
30	50	11	AP 1709 A0 ※	AP 1709 G3
32	52	11	AP 1904 G0	—
34	54	11	AP 1978 F0	—
35	55	11	AP 2085 A0 ※	AP 2085 H2
38	58	11	AP 2240 A0	AP 2240 H2
40	62	11	AP 2388 A0	AP 2388 F2
42	65	12	AP 2507 G0	—
45	68	12	AP 2668 A0	AP 2668 H0
48	70	12	AP 2791 F0	—
50	72	12	AP 2864 A0 ※	AP 2864 J0
52	75	12	AP 2967 F0	—
55	78	12	AP 3055 G0 ※	—
58	80	12	AP 3154 E0	—
60	82	12	AP 3222 G0	—
62	85	12	AP 3297 F0	—